


Xpress Radio System for Small Networks

X-DIGITAL Headend




- Control systems via IP or RS-232
- Encodes up to 4 channels
- Controls receivers through in-band channel
- Supports receiver groupings

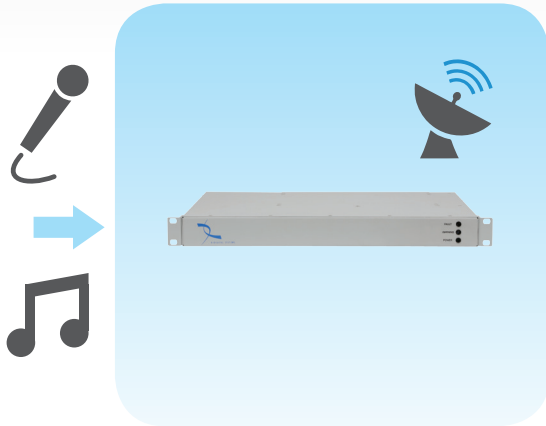

Live
Programming



XDS-PRO Receivers

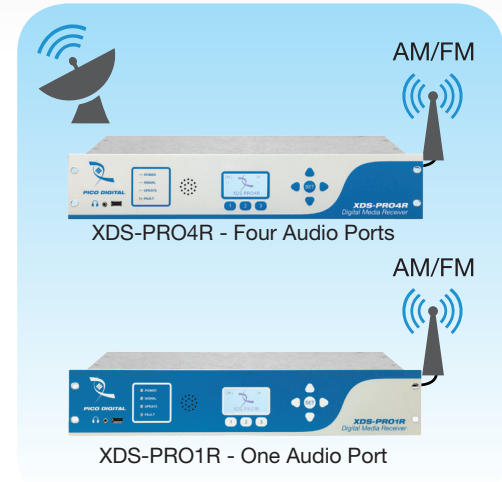

- Locally or centrally controlled
- Supports low bitrate carriers down to 256 Kbaud

Low Cost Replacement Of Aging One or Two Channel SCPC Systems

Xpress System Topology

